



25 captures

7 Jun 97 - 4 May 05

http://www.storage.ibm.com/techsup/hddtech/wda3160/wda3tek.htm

Go

DEC MAR JUN Close

8

1999 2001 2002 Help



ShopIBM Support Downloads

Home Products Consulting Industries News About IBM

Models WDA-380 & WDA-3160

Search

All of IBM

Go

Advanced search

Storage

Hard disk drives

Products

How to buy

Technical support

News

Resources

Case studies

How to...

Contact hard drives

Related link:

IBM Microelectronics technical library

IBM Worldwide

LED port

Pin pitch is 0.1 inch



Pin #	Status	Description	Signal name
1	Out	-LED	-LED
2	Out	+LED	+LED

Signal description LED output (+LED)

This pin has a maximum current source capability about +18 mA at nominal condition. This pin is designed to put a LED light.


Signal description LED output (-LED)

This pin has a current sink capability about +100 mA at 0.25 V in the worst case. This pin is designed to

put a LED light.

Switch setting

4-bit dip switch on the control card is available for a drive configuration. When the drive leaves the factory, the switch will be set as shown below.

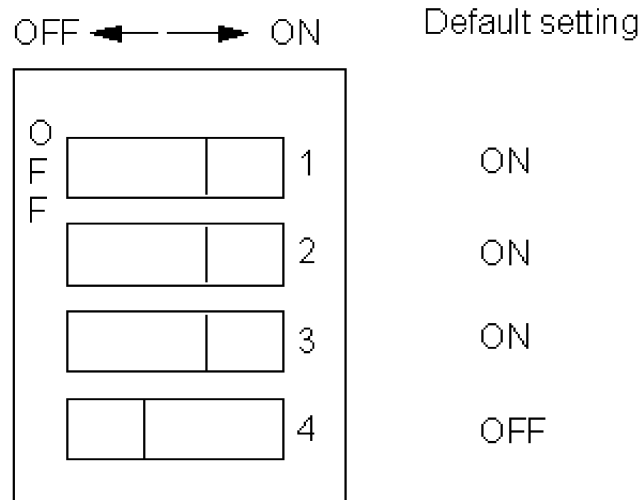

Note: When a drive 1 (slave) is installed in the system with a drive 0 (master) already installed, there is no change to the switch setting for a drive 0 (master). Only the switch of drive 1 (slave) is required to be set.

Bit No.	Name	Description
1	IORDY	If a host supports IORDY signal, this bit must be set ON.
2	-DRV0/DRV1	When set ON, the drive is set as drive 0 (master) When set OFF, the drive is set as drive 1 (slave)
3	-CAM/AT	This bit must be set ON
4	--	Not available