


There are two switches located on the left rear side of the Printer. These switches allow you to customize some of the DMP-105 features for your own applications.

When you receive the DMP-105, all switches should be set to OFF (i.e. in the down position). By setting certain switches ON, before turning the DMP-105's power ON, you can select different baud rates and interface modes.

REMEMBER!! THE PRINTER POWER MUST BE OFF BEFORE YOU CAN CHANGE ANY OF THE SWITCHES.

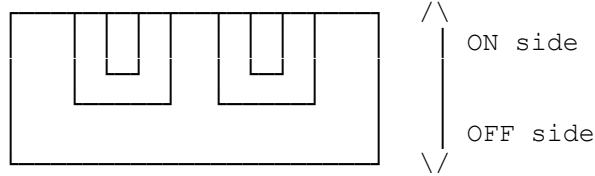

POSITION	SYMBOL	OFF	ON
1	Parallel/Serial	Parallel Interface is available.	Serial Interface is available.
2	2400 BPS/600 BPS	When the Serial Interface is available, transmission rate is set to 2400 BPS.	When the Serial Interface is available, transmission rate is set to 600 BPS.

(css 07/26/93)

□