


EXCLUSIVE!

ALTAIR 8800

The most powerful minicomputer project ever presented—can be built for under \$400

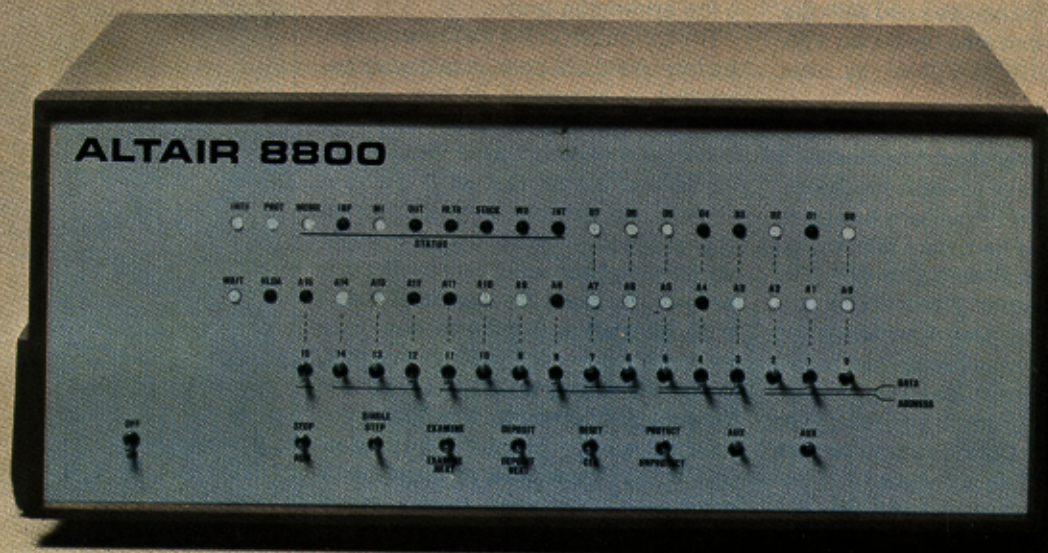

BY H. EDWARD ROBERTS AND WILLIAM YATES

THE era of the computer in every home—a favorite topic among science-fiction writers—has arrived! It's made possible by the POPULAR ELECTRONICS/MITS Altair 8800, a full-blown computer that can hold its own against sophisticated minicomputers now on the market. And it doesn't cost several thousand dollars. In fact, it's in a color TV-receiver's price class—under \$400 for a complete kit.

The Altair 8800 is not a "demonstrator" or souped-up calculator. It is the most powerful computer ever presented as a construction project in any electronics magazine. In many ways, it represents a revolutionary development in electronic design and thinking.

The Altair 8800 is a parallel 8-bit word/16-bit address computer with an instruction cycle time of 2 μ s. Its cen-

tral processing unit is a new LSI chip that is many times more powerful than previous IC processors. It can accommodate 256 inputs and 256 outputs, all directly addressable, and has 78 basic machine instructions (as compared with 40 in the usual minicomputer). This means that you can write an extensive and detailed program. The basic computer has 256 words of memory, but it can be economically expanded for 65,000 words. Thus, with full expansion, up to 65,000 subroutines can all be going at the same time.

The basic computer is a complete system. The program can be entered via switches located on the front panel, providing a LED readout in binary format. The very-low-cost terminal presented in POPULAR ELECTRONICS last month can also be used.

PROCESSOR DESCRIPTION

Processor: 8 bit parallel
 Max. memory: 65,000 words (all directly addressable)
 Instruction cycle time: 2 μ s (min.)
 Inputs and outputs: 256 (all directly addressable)
 Number of basic machine instructions: 78 (181 with variants)
 Add/subtract time: 2 μ s
 Number of subroutine levels: 65,000
 Interrupt structure: 8 hardwire vectored levels plus software levels
 Number of auxiliary registers: 8 plus stack pointer, program counter and accumulator
 Memory type: semiconductor (dynamic or static RAM, ROM, PROM)
 Memory access time: 850 ns static RAM; 420 or 150 ns dynamic Ram